

Technical Information

ULTIMATE PIPE FLASHING®

24ga G60 Galvanized Steel Plate with Kynar® Finish

PRODUCT DESCRIPTION

The **Ultimate Pipe Flashing® (UPF)** is a high-performance plumbing vent stack flashing for use on steep slope shingled roofs. The UPF's patented design incorporates a 100% pure silicone boot with a precision engineered compression fit to the vent pipe. The bottom of the boot is crimped into a 24ga G60 galvanized steel base plate with a Kynar® finish, creating a seamless transition from the roof deck, while the top of the boot is held in compression against the vent pipe with a size-specific PVC compression collar, thus creating a permanent waterproof seal.

INSTRUCTIONS FOR USE / RECOMMENDATIONS

Please follow installation instructions on the box. The **Ultimate Pipe Flashing®** (is sized to seal 5 specific pipe diameters (1¼", 1½", 2", 3" & 4"). Measure the inside dimension of the pipe and then select the appropriate size **UPF** for installation. After installing shingles up to the pipe penetration, remove the **UPF** from the box. Always leave the compression collar on the boot for the entire installation. Open the enclosed lubricating towelette and wipe the inside neck of the silicone boot and wipe the exterior of the pipe to be flashed, this will facilitate installation, then immediately fit the boot with the attached compression collar over the pipe and with two hands, push the boot down over the pipe using the compression collar until the entire plate rests flat on the deck. Plumbing vent pipes can be constructed from materials other than PVC/ABS, such as cast iron or copper. These alternate vent pipes may require the use of an **EASYSleeve®** or **EASYFit™** - SEE TECHNICAL DATA

BENEFITS

- Available in 24ga G60 galvanized steel with a Dark Bronze Kynar® Paint finish or brush rolled 316L Stainless Steel
- Pure silicone impervious to UV damage, will not dry out
- Pipe size specific boot ensures a permanent pipe to boot seal when coupled with a precision engineered PVC Compression collar that keeps the boot tight to the pipe for the life of the roof
- Large flashing plate with 4in per side overlaps for proper water shedding installation without the need for additional sealants
- Adapted to provide sealed installation on roof pitch from flat to 18/12(+)
- G60 Galvanized Kynar® painted plate is highly corrosion resistant
- Does not contain lead
- Proprietary plate design lays flat and stays flat to roof for years
- Warrantied for Life of Roof!



Specific Data

ULTIMATE PIPE FLASHING

Materials:

Plate 24ga G60 galvanized steel manufactured in accordance with ASTM A 653-09, coated with a Kynar® (PVDF) paint finish top side, consisting of 0.7 to 0.8 of a mil with 0.2-0.3 mil primer on the underside.

PVC Compression Collar Rigid polyvinyl chloride, which is a special purpose rigid extrusion PVC compound for exterior applications. This compound for applications requiring weather ability, gloss, impact strength and toughness, flame retardant, extra durability, and moldability.

Silicone Boot 100% pure silicone rubber. 3/16" thick nominal wall. HCR silicone rubber molding manufactured in accordance with ASTM G-154-06 resistance to UV exposure and ASTM D 1149-99, resistance to surface ozone cracking.

Sizing Availability Flashing for Sch. 40 PVC DWV pipe sizes: 1 1/4", 1 1/2", 2", 3" and 4" pipes. Based on Schedule 40 PVC, ABS and some galvanized pipe.

Packaging One (1) per box with bilingual installation instructions and a lubricating towelette attached to the flashing plate.

Dimensions of Packaging 19"L x 15"D x 4"W 3lbs. (small plate)
21"L x 16"D x 4"W 4lbs. (large plate)

Notes All parts made and assembled in the U.S.A.
Florida Product approval: #F16031
Patents 8484914 & D662230
CAGE Code: 94YWS

**LIFETIME TOOL
& BUILDING
PRODUCTS LLC**
FINEST QUALITY ROOFING COMPONENTS

Plate Size: 1 1/4" ; 1 1/2" & 2"




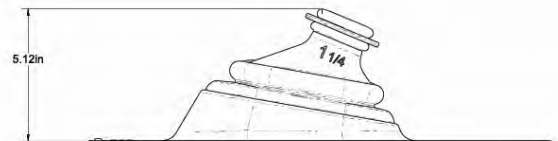


Plate Size: 3" & 4"

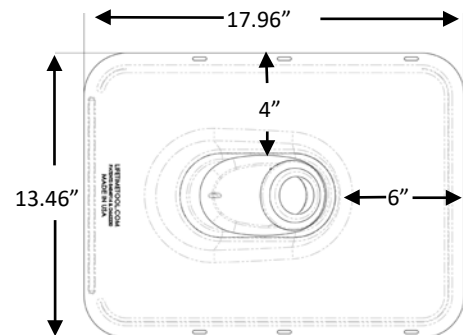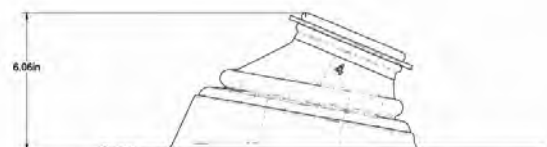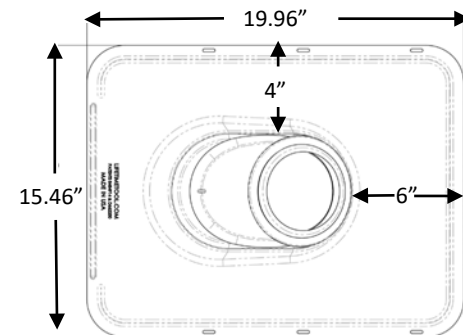

Applicable Testing:	ASTM E 283-04	Air leakage test
	ASTM E 331-00	Water penetration test
	ASTM B 117-09	Standard practice for operation salt spray (FOG) apparatus
	FM 4471-95	Appendix G; Susceptibility to leakage test
	ASTM E 2140-01	Standard test method for structural performance by unit for static air pressure difference
	Florida TAS 100-95	Test procedure for wind and wind driven rain resistance