

Technical Information

LT-AP Snow Guard

LIFETIME TOOL[®]
& BUILDING
PRODUCTS LLC
FINEST QUALITY ROOFING COMPONENTS

PRODUCT DESCRIPTION

The Lifetime Tool AP Snow Guard is made to accommodate snap-lock interlocking panels as well as standing seams up to a .516" thickness. Designed and made in the USA, the Lifetime Tool AP Snow Guard prevents snow loads from sliding off metal roofs causing injury or damage. Made of Almag 35 (aluminum/magnesium) a pure certified alloy that does not corrode or break. The Lifetime Tool AP Snow Guard features 4 set screws to make installation fast and easy, while preventing panel damage during installation. The set screws forms an I-Beam structure in the square pocket for increased holding ability. This snow guard will not break or corrode.



INSTALLATION

LT-AP 400 is sized properly for 26ga snap-lock roofs, and the LT-AP 500 is suited for 22ga and 24ga snap-lock metal roofs. The LT-AP Snow Guard has 4 set screws to ensure a fast and secure install. Position snow guard over seam and use a 3/16" hex driver bit to secure the snow guard in place.

BENEFITS

- Made of Almag 35
- Superior substrate for painting or coating
- Patented angled set screws to prevent panel damage during install
- Fast installation
- Unmatched strength and durability
- Available in Mill Finish or 10 factory applied Kynar[®] finishes
- AP400 and AP500 available
- Warrantied for Life of Roof!



Specific Data

LIFETIME TOOL[®]
& BUILDING
PRODUCTS LLC
FINEST QUALITY ROOFING COMPONENTS

Materials

Metals

Made of Almag 35, a high strength alloy used for electronic equipment, aircraft components and parts requiring a high degree of dimensional stability and strength. Superior ductility makes it an excellent replacement for malleable iron. No heat treat required.

Packaging




Fifty (50) per box (or by the piece) with installation instructions and an 3/16" hex Allen wrench included in the box. Additional 3/16" hex power bits are available for purchase.

Dimensions of Packaging

12"L x 12"D x 12"W 37.5lbs.

Notes

All parts manufactured in the U.S.A.
CAGE Code: 94YWS

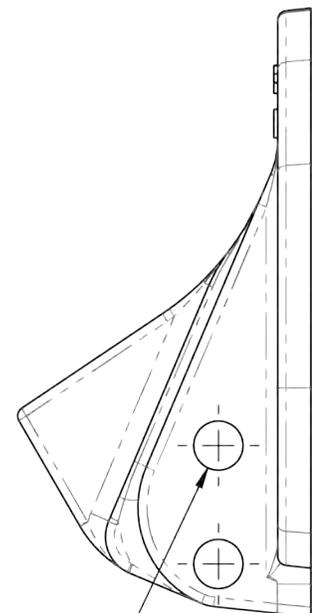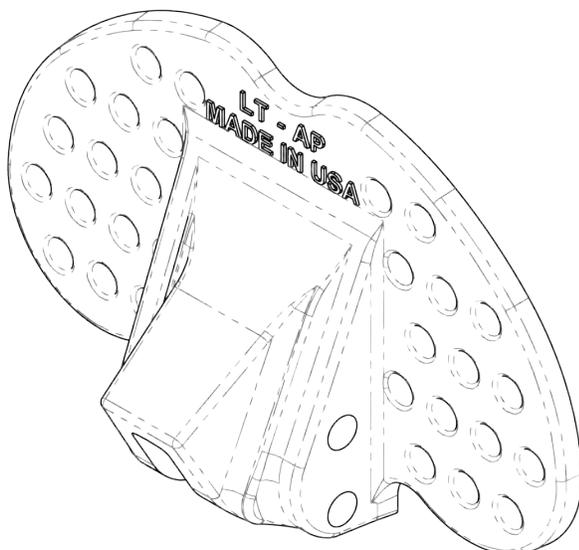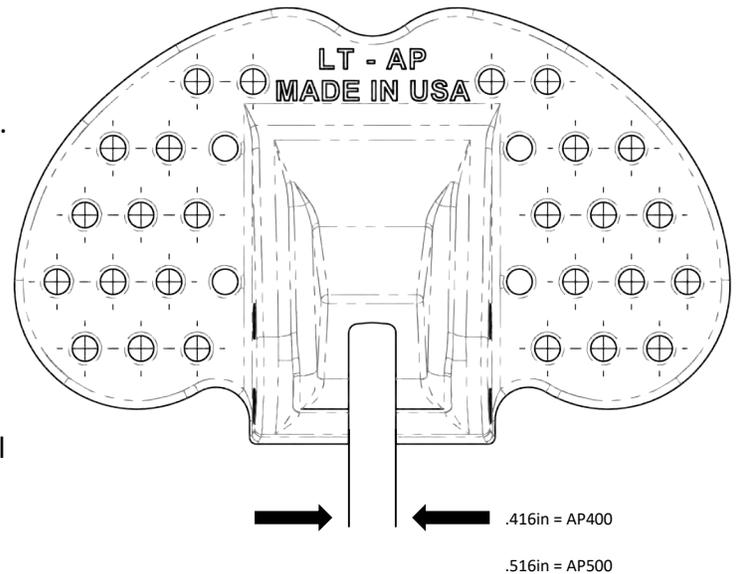

2X Ø .31 THRU ALL
3/8-16 UNC THRU ALL